FULL-HEIGHT TURNSTILE

# KFH1515

A single-lane full-height turnstile with a 120° three-arm rotor, for entry and exit through the same lane. At 2.3 metres high, with guard rails on both sides, it stops tailgating, reverse passage and climbing over. A high-security gate for sites such as banks and prisons.




| 2300 | IP54 | 550–600 | 35 |
|---|---|---|---|
| mm height | protection | mm lane width | persons per minute |

## SPECIFICATIONS

| | |
|---|---|
| Dimensions | 1500 × 1500 × 2300 mm (L × W × H) |
| Material | 304 stainless steel |
| Protection | IP54 |
| Rotor | 120°, three arms |
| Working voltage | 24 V DC |
| Arm | 500 mm |
| Lane width | 550–600 mm |
| Throughput | 35 persons per minute with RFID |
| Power input | 110–240 V AC |
| Operating temperature | −10 °C to +70 °C |
| Humidity | < 95 %, non-condensing |

**Keyable Europe** — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.

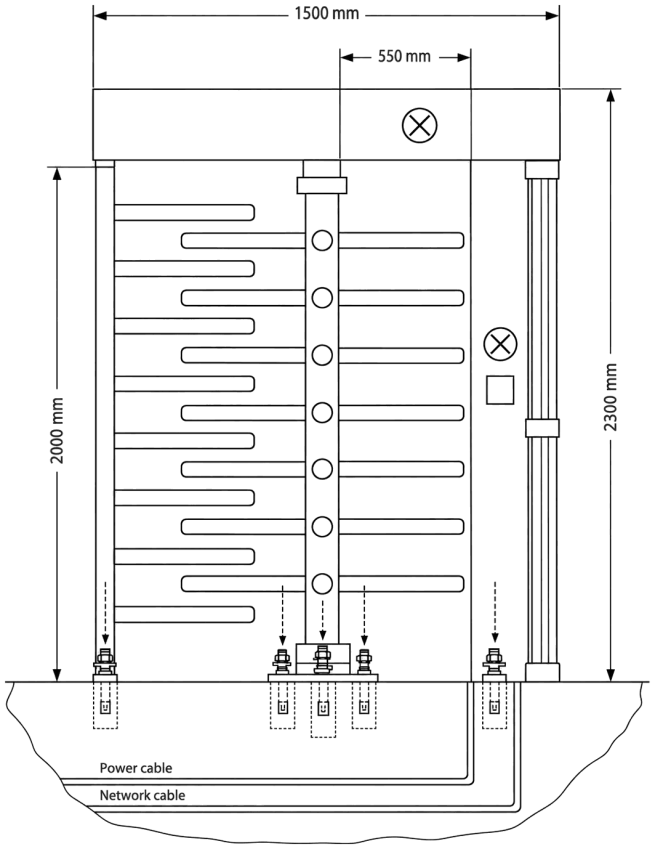


Front installation view with power and network cable routes. All dimensions in millimetres.

## SAFETY AND SECURITY

- Self-test at start-up, returns to the locked state automatically
- One-way or bidirectional passage, configurable
- Free passage in an emergency
- Standard I/O interface for third-party access control
- LED indicators show the lane status

## OPTIONS AND CONFIGURATION

| | |
|---|---|
| Cabinet | Size and shape to order |
| Arm | Arm length to order |
| Counter | People counter with LED display |
| Readers | RFID, QR code, face recognition, fingerprint |
| Direction control | Credential in and out · credential in, free exit · entry only |