FULL-HEIGHT TURNSTILE

KFH2315

A double-lane full-height turnstile with a full top cover, for indoor and outdoor use. A 90° cross arm or a 120° three-arm rotor is available. Guard rails on both sides stop tailgating, reverse passage and climbing over, for sites with high security requirements.




2	650	600	35
lanes	mm lane width	mm arm	persons per minute

SPECIFICATIONS

Dimensions	2300 × 1500 × 2300 mm (W × D × H)
Material	304 stainless steel
Installation	Indoor and outdoor
Rotor	90° cross arm or 120° three arms
Working voltage	24 V DC
Arm	600 mm
Lane width	650 mm
Throughput	35 persons per minute with RFID
Power input	110–240 V AC
Operating temperature	−10 °C to +70 °C
Humidity	< 95 %, non-condensing

Keyable Europe — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.

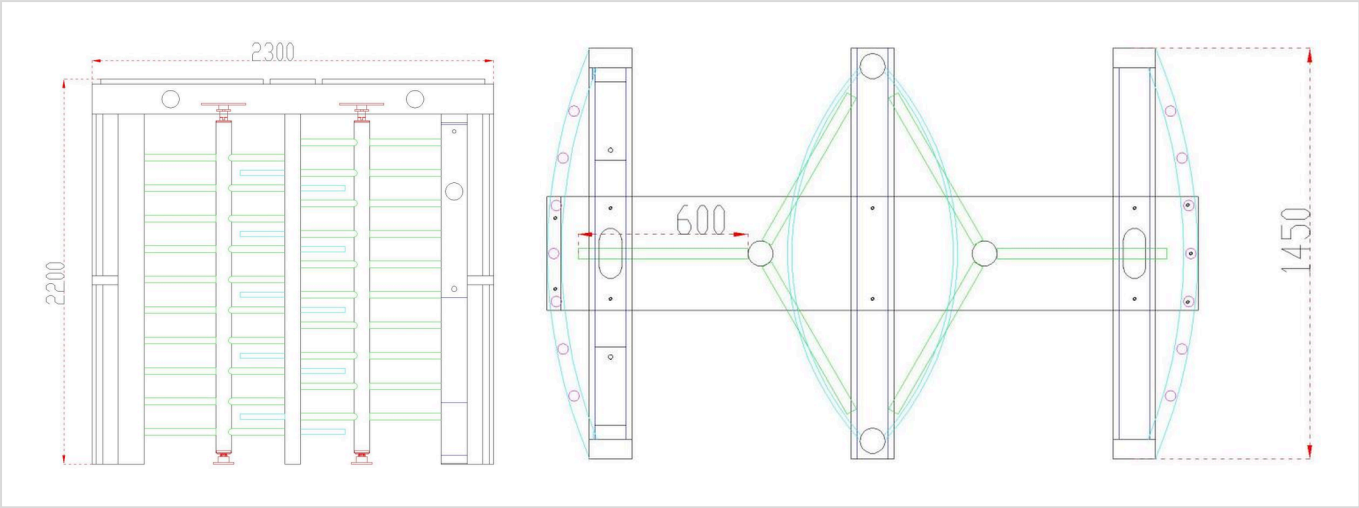

Front and top views. All dimensions in millimetres.

SAFETY AND SECURITY

- Self-test at start-up, returns to the locked state automatically
- One-way or bidirectional passage, configurable
- Free passage in an emergency
- Standard I/O interface for third-party access control
- LED indicators show the lane status

OPTIONS AND CONFIGURATION

Cabinet	Size and shape to order
Arm	Arm length to order
Counter	People counter with LED display
Readers	RFID, QR code, face recognition, fingerprint
Direction control	Credential in and out · credential in, free exit · entry only