HALF-HEIGHT TURNSTILE

# KHH1428-B

A half-height turnstile for reliable access control where medium security is needed. The stainless steel build is compact and robust, for indoor and outdoor use. It turns smoothly in both directions and works with RFID cards, QR codes and biometric readers. For offices, factories, gyms and transport hubs.




| IP54 | 550–600 | 500 | 35 |
|---|---|---|---|
| protection | mm lane width | mm arm | persons per minute |

## SPECIFICATIONS

| | |
|---|---|
| Dimensions | 1400 × 1380 × 1200 mm (W × D × H) |
| Material | 304 stainless steel |
| Protection | IP54 |
| Working voltage | 24 V DC |
| Arm | 500 mm |
| Lane width | 550–600 mm |
| Throughput | 35 persons per minute with RFID |
| Power input | 110–240 V AC |
| Operating temperature | −10 °C to +70 °C |
| Humidity | < 95 %, non-condensing |

**Keyable Europe** — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.

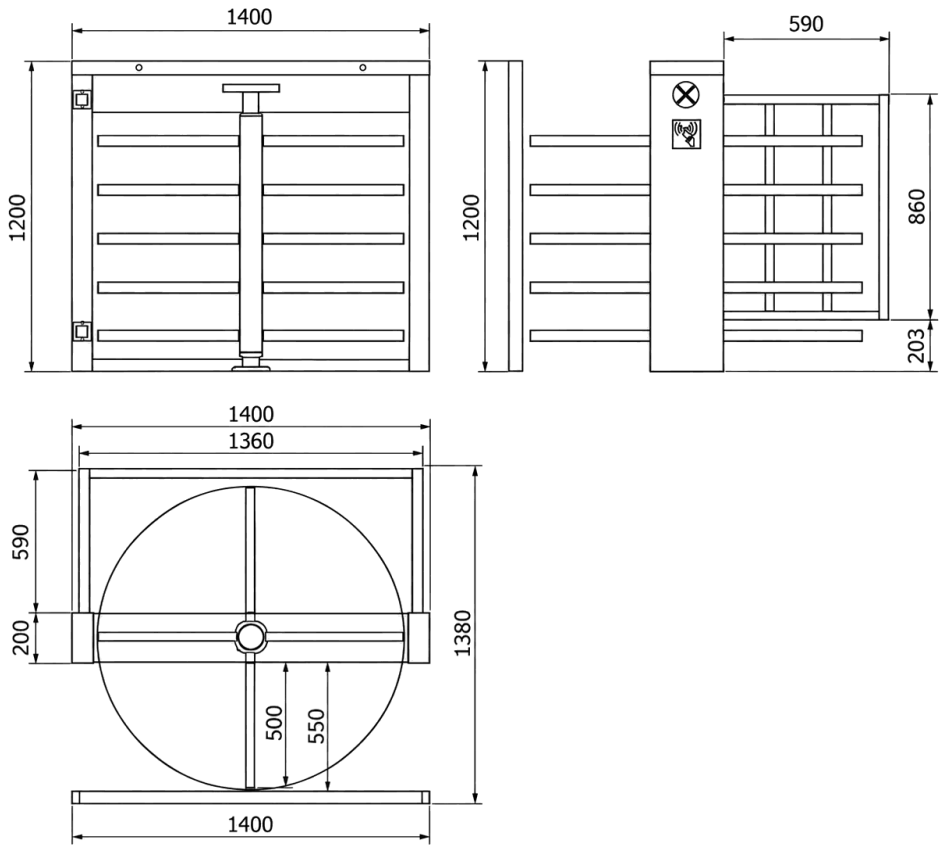


Front, side and top views. All dimensions in millimetres.

## SAFETY AND SECURITY

- Self-test at start-up, returns to the locked state automatically
- One-way or bidirectional passage, configurable
- Free passage in an emergency
- Standard I/O interface for third-party access control
- LED indicators show the lane status

## OPTIONS AND CONFIGURATION

| | |
|---|---|
| Cabinet | Size and shape to order |
| Arm | Arm length to order |
| Counter | People counter with LED display |
| Readers | RFID, QR code, face recognition, fingerprint |
| Direction control | Credential in and out · credential in, free exit · entry only |