
HALF-HEIGHT TURNSTILE

KHH1428

A half-height turnstile for reliable access control where medium security is needed. The stainless steel build is compact and robust, for indoor and outdoor use. It turns smoothly in both directions and works with RFID cards, QR codes and biometric readers. For offices, factories, gyms and transport hubs.

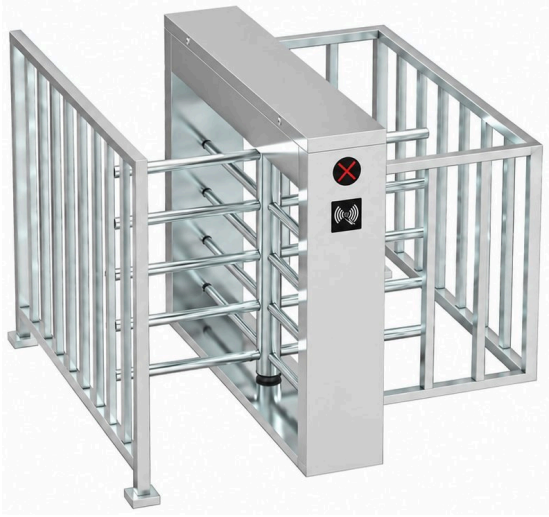


IP54	550–600	500	35
protection	mm lane width	mm arm	persons per minute

SPECIFICATIONS

Dimensions	1400 × 1380 × 1200 mm (W × D × H)
Material	304 stainless steel
Protection	IP54
Working voltage	24 V DC
Arm	500 mm
Lane width	550–600 mm
Throughput	35 persons per minute with RFID
Power input	110–240 V AC
Operating temperature	−10 °C to +70 °C
Humidity	< 95 %, non-condensing

Keyable Europe — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.

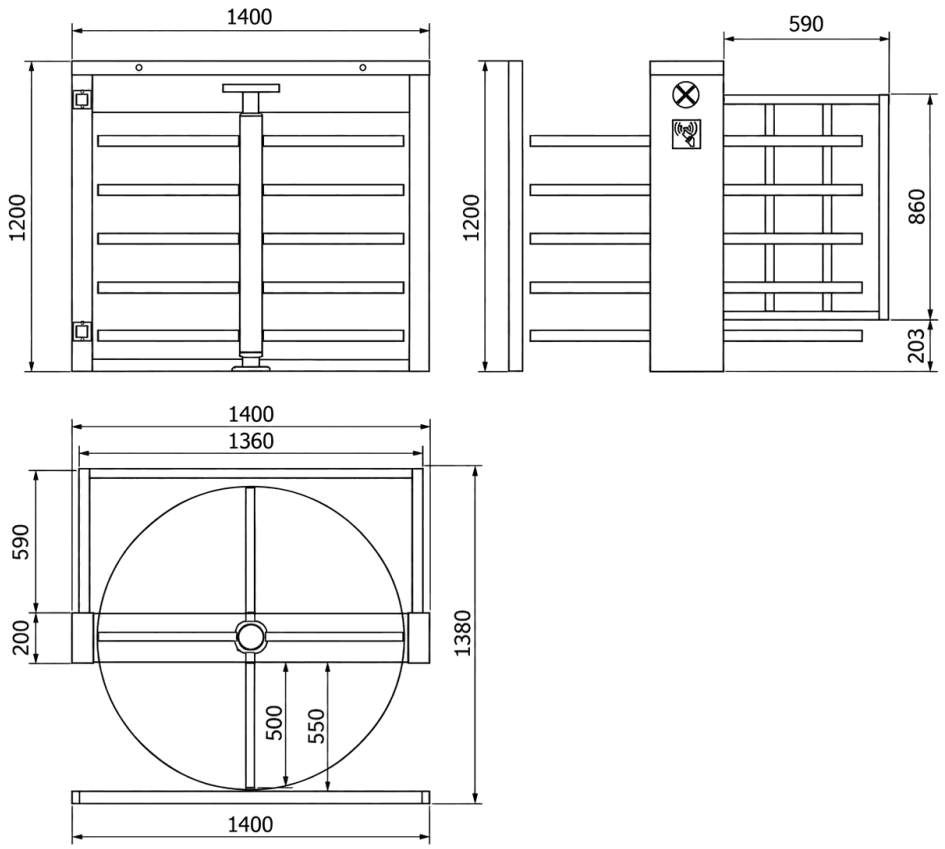

Front, side and top views. All dimensions in millimetres.

SAFETY AND SECURITY

- Self-test at start-up, returns to the locked state automatically
- One-way or bidirectional passage, configurable
- Free passage in an emergency
- Standard I/O interface for third-party access control
- LED indicators show the lane status

OPTIONS AND CONFIGURATION

Cabinet	Size and shape to order
Arm	Arm length to order
Counter	People counter with LED display
Readers	RFID, QR code, face recognition, fingerprint
Direction control	Credential in and out · credential in, free exit · entry only