SWING BARRIER

KSB1000

A small swing barrier that can work as a single gate on one side of the lane. Suited to supermarkets and other compact entrances. A 24 V DC motor swings the arm, and the barrier takes the unlock signal from any third-party access controller.




600–800	35	1090	304
mm lane width	persons per minute	mm height	stainless steel

SPECIFICATIONS

Cabinet	200 × 180 × 1090 mm (L × W × H)
Arm	600 mm
Material	304 stainless steel
Drive	24 V DC brushed motor
Lane width	600–800 mm
Throughput	up to 35 persons per minute
Power input	110–240 V AC
Communication	RS485
Unlock signal	Any third-party access controller
Direction	One-way or bidirectional, configurable
Operating temperature	−10 °C to +70 °C
Humidity	< 95 %, non-condensing

Keyable Europe — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.

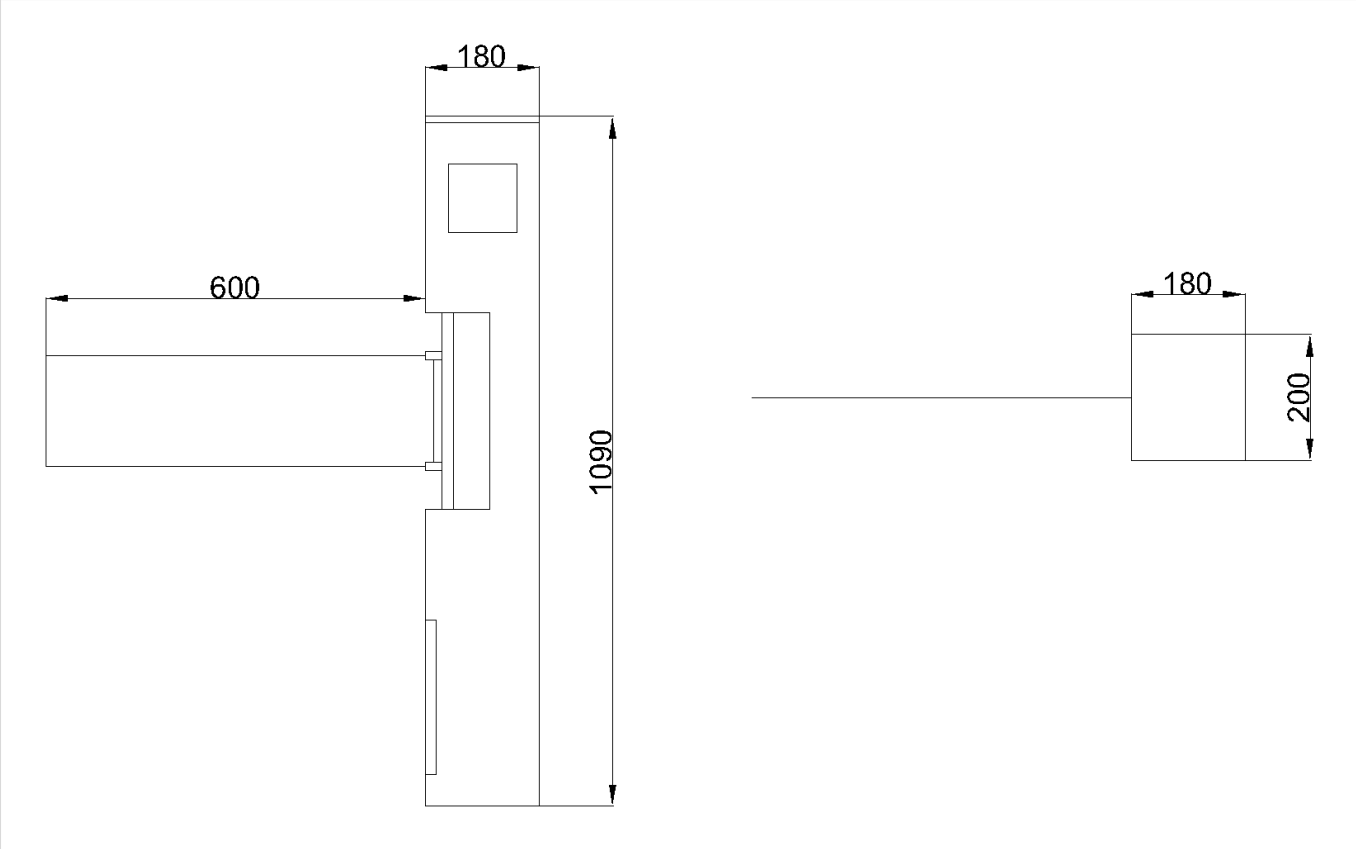

Side and top views with a 600 mm arm. All dimensions in millimetres.

SAFETY AND SECURITY

- Opens automatically on power failure
- Closes automatically on timeout

OPTIONS AND CONFIGURATION

Cabinet	Size, shape and finish to order; space for third-party terminals
Control unit	Access controller
Readers	ID / IC / NFC cards, QR and barcode, face recognition, fingerprint
Accessories	Display counter