SWING BARRIER

KSB1412

A swing barrier for busy entrances that need both security and a refined look. The slim body in stainless steel and tempered glass suits offices, airports, metro stations and commercial buildings, indoors or outdoors. A precision brushless motor gives fast, quiet and stable movement, and LED lights on the top cover guide visitors.




600–1000	35	4	1000
mm lane width	persons per minute	pairs of IR sensors	mm height

SPECIFICATIONS

Cabinet	1400 × 120 × 1000 mm (L × W × H)
Material	304 stainless steel or electroplated stainless steel
Colours	SUS304 standard; champagne gold or black optional
Drive	24 V DC brushless motor
IR sensors	4 pairs
Lane width	600–1000 mm
Throughput	up to 35 persons per minute
Power input	110–240 V AC
Unlock signal	Any third-party access controller
Direction	One-way or bidirectional, configurable
Operating temperature	−10 °C to +70 °C
Humidity	< 95 %, non-condensing

Keyable Europe — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.

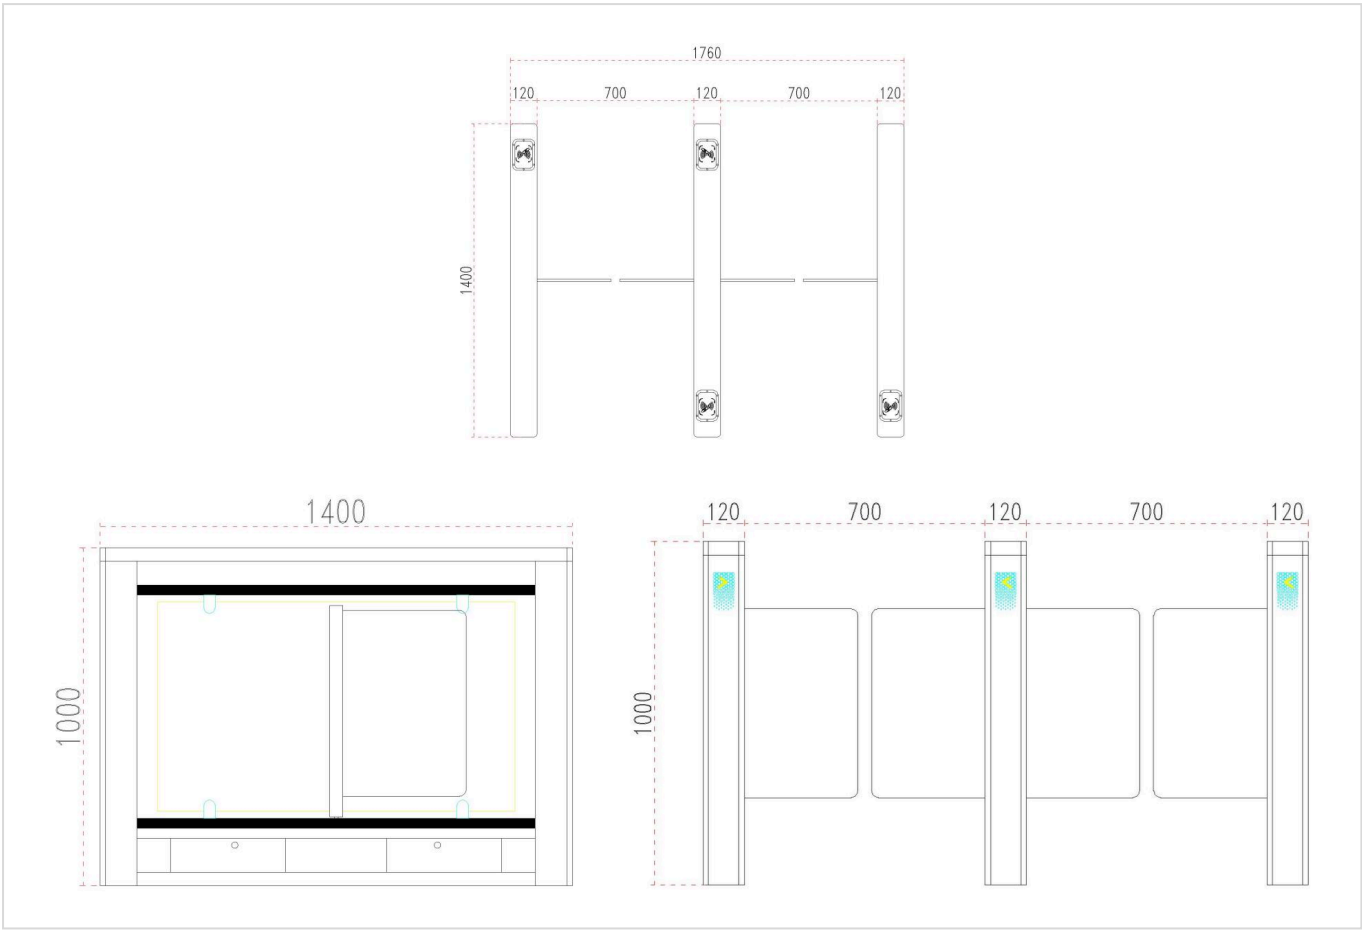

Top, side and front views. All dimensions in millimetres.

SAFETY AND SECURITY

- Opens automatically on power failure
- Closes automatically on timeout
- Infrared detection with intelligent alarm
- Tailgating alarm
- Reverse-passage alarm
- Unauthorised entry alarm, the lane stays closed
- Anti-pinch: the barrier stays open while a person is in its path

OPTIONS AND CONFIGURATION

Cabinet	Size, shape and finish to order; space for third-party terminals
Control unit	Access controller or ticketing controller
Readers	ID / IC / NFC cards, QR and barcode, face recognition, fingerprint, ESD tester
Accessories	Card collector, coin acceptor, display counter
Lanes	Single lane or a row of any number of lanes
Direction control	Credential in and out · credential in, free exit · entry only

Keyable Europe — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.