
SWING BARRIER

KSB1518-BG

A slim swing barrier with an electroplated, fingerprint-resistant surface that stays clean and is easy to wipe. Elegant lines suit modern spaces, and a range of colour combinations lets the barrier match the interior of commercial and public buildings.

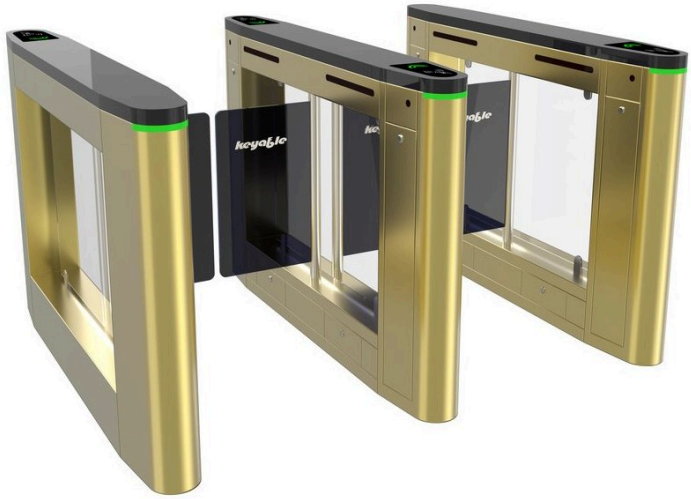


600–1000	35	6	1000
mm lane width	persons per minute	pairs of IR sensors	mm height

SPECIFICATIONS

Cabinet	1500 × 180 × 1000 mm (L × W × H)
Material	SUS304 standard; coloured electroplated anti-fingerprint stainless steel optional
Drive	24 V DC premium brushless motor; economical brushless motor or brushless motor with clutch damper optional
IR sensors	6 pairs
Lane width	600–1000 mm
Throughput	up to 35 persons per minute
Power input	110–240 V AC
Unlock signal	Any third-party access controller
Direction	One-way or bidirectional, configurable
Operating temperature	−10 °C to +70 °C
Humidity	< 95 %, non-condensing

Keyable Europe — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.

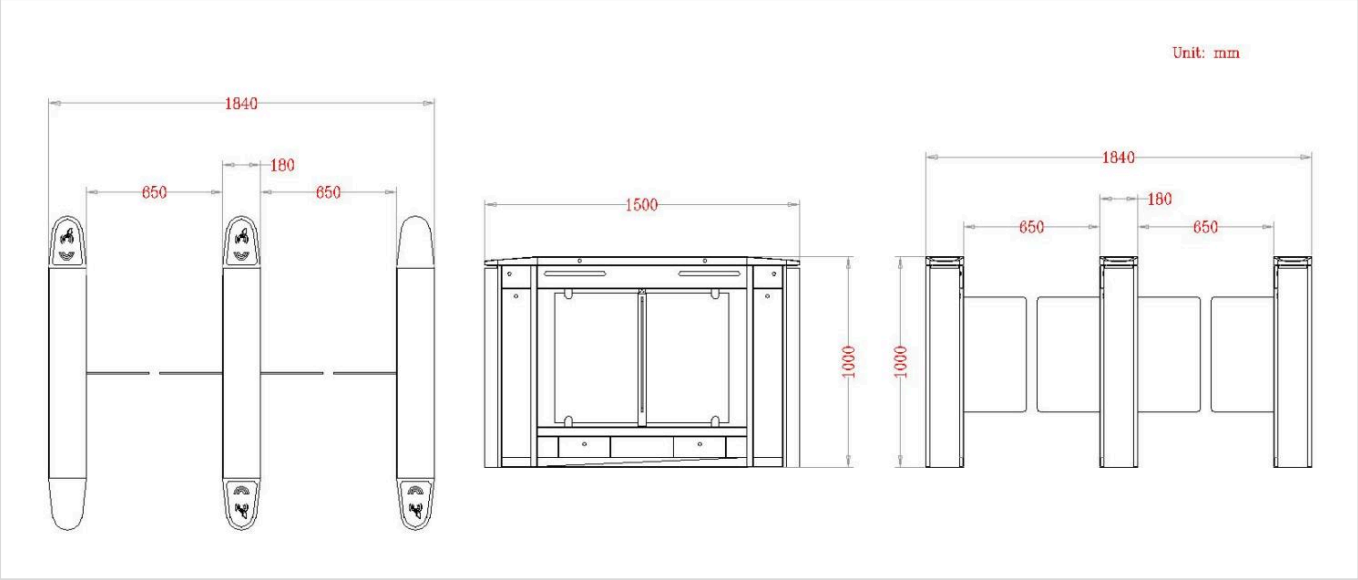

Front, top and end views. All dimensions in millimetres.

SAFETY AND SECURITY

- Opens automatically on power failure
- Closes automatically on timeout
- Infrared detection with intelligent alarm
- Tailgating alarm
- Reverse-passage alarm
- Unauthorised entry alarm, the lane stays closed
- Anti-pinch: the barrier stays open while a person is in its path

OPTIONS AND CONFIGURATION

Cabinet	Size, shape, steel thickness and finish to order; space for third-party terminals
Motor	Economical motor for 550–650 mm lanes; premium motor for accessible lanes of 800 mm and more
Control unit	Access controller or ticketing controller
Readers	ID / IC / NFC cards, QR and barcode, face recognition, fingerprint, ESD tester
Accessories	Card collector, coin acceptor, display counter
Direction control	Credential in and out · credential in, free exit · entry only