TRIPOD TURNSTILE

KT1200-R

A tripod turnstile with a modern design. Its mechanism allows a slimmer, more elegant cabinet, and a hydraulic damper makes the arms run smoothly and quietly. The cabinet is available in several colours with an electroplated finish, for indoor and outdoor use.





550	30	1000	304
mm lane width	persons per minute	mm height	stainless steel

SPECIFICATIONS

Cabinet	1200 × 400 × 1000 mm (L × W × H)
Material	304 stainless steel, electroplated finish
Drive	24 V DC solenoid locking mechanism with hydraulic damper
Lane width	550 mm
Throughput	up to 30 persons per minute
Power input	110–240 V AC
Unlock signal	Any third-party access controller
Direction	One-way or bidirectional, configurable
Operating temperature	−10 °C to +70 °C
Humidity	< 95 %, non-condensing

Keyable Europe — Digital Access Logic d.o.o., Jug Bogdanova 4, 12000 Požarevac, Serbia
office@dal.rs · keyable.global
Issue 10 / 2026
Specifications may change without notice. Please confirm before ordering.

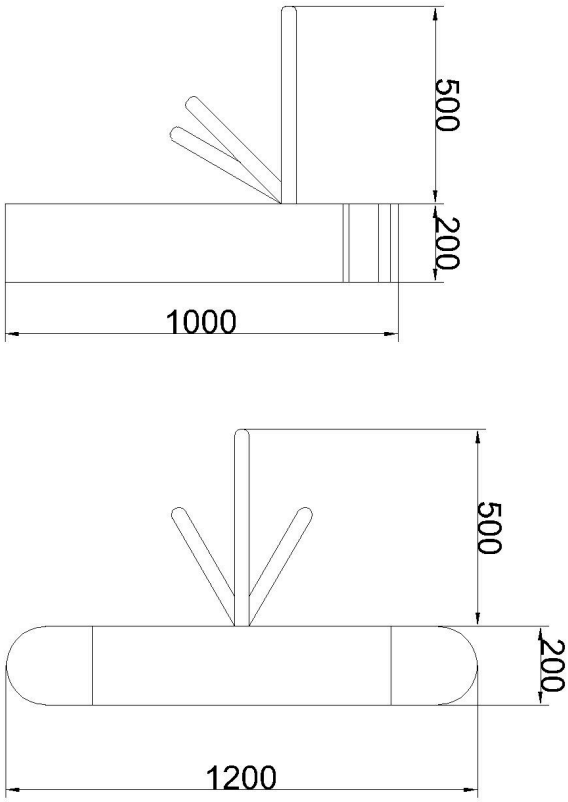

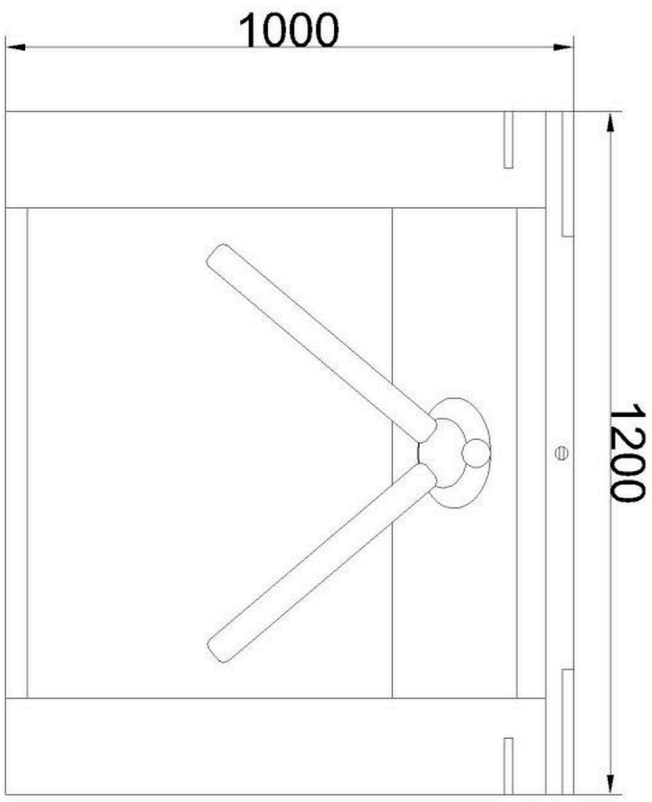

Front, top and side views. All dimensions in millimetres.

SAFETY AND SECURITY

- Arm drops automatically on power failure
- Locks automatically on timeout
- Hydraulic damper for smooth, quiet rotation

OPTIONS AND CONFIGURATION

Cabinet	Size, shape and finish to order; space for third-party terminals
Control unit	Access controller or ticketing controller
Readers	ID / IC / NFC cards, QR and barcode, face recognition, fingerprint, ESD tester
Accessories	Card collector, coin acceptor, display counter
Direction control	Credential in and out · credential in, free exit · entry only